

## Technical Data

# CLASSICS

## OH C 1145 DL, 80010701

Hg metal halide lamp

### Dimensions:

la: 137,0 mm <sup>+2,0</sup>/<sub>-2,0</sub>    lc: 52,0 mm    le:  
 lb: 116,2 mm    ld: 350,0 m <sup>+5,0</sup>/<sub>-5,0</sub>    da: 18,5 mm  
 Connection / socket:    Litzen / abisolierte Enden

### Electrical data:


Lamp wattage:            1.000 W  
 Lamp voltage:            145 (±15,0)V  
 Lamp current:            8,2 A  
 Line voltage:            230 V  
 Ballast:                  Ballast 1000 HP  
 Ignitor:                  Ignitor 10/1000

### Operating conditions:



Burning position:        horizontal  
 Body temperature:      650°C - 950°C  
 Pinch temperature:     < 300°C  
 Ignition retardation:    20 s

### Life time:

Useful lifetime:            700 h  
 Intensity drop:            ≤ 30 % 315-400 nm nm after  
                                   500 h - based on 20 h level  
 Power switching:         25' / 5' (on/off) On/Off

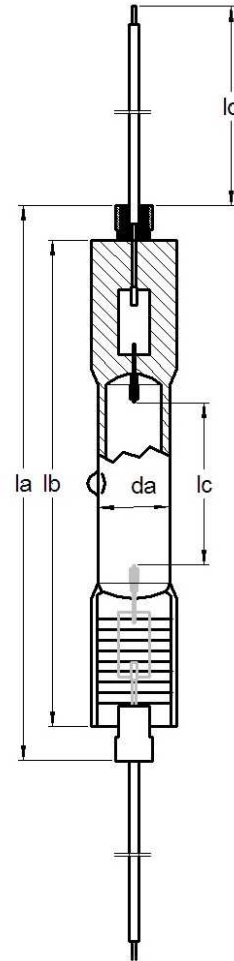

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

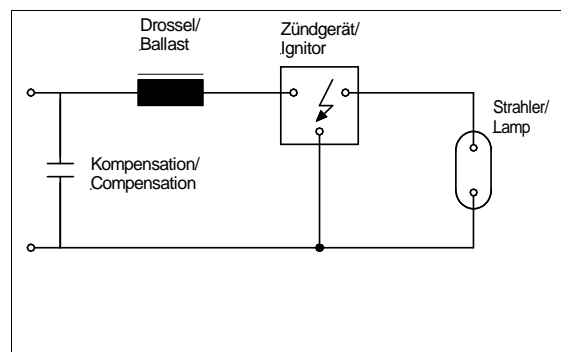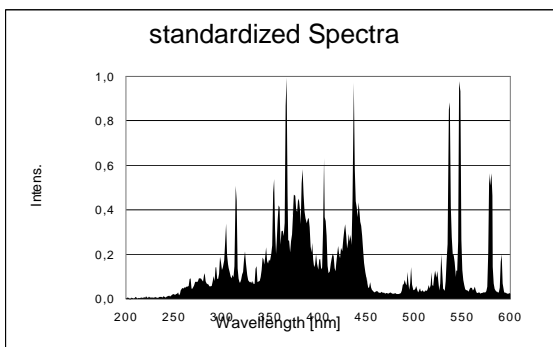

**HN Sunlight GmbH**  
 Original Hanau SunCare  
 Wilhelm-Rohn-Straße 25  
 D-63450 Hanau  
 Phone: 06181 / 35-5092  
 Fax.: 06181 / 35-5096  
 E-Mail: info@original-hanau-suncera.com  
 www.original-hanau-suncare.com

