

Technical Data

MagicSun

OH M 500 L, 45006331

Hg metal halide lamp

Dimensions:

la: 110,0 mm ^{+0,0}/_{-3,0} lc: 32,0 mm le:
 lb: 93,0 mm ld: 400,0 m ^{+2,0}/_{-2,0} da: 16,3 mm
 Connection / socket: Litzen / abisolierte Enden

Electrical data:


Lamp wattage: 500 W
 Lamp voltage: 145 (±15,0)V
 Lamp current: 4,0 A
 Line voltage: 230 V
 Ballast: Ballast 400 HP || 100 HP
 Ignitor: ZRM 4.5 ES/B

Operating conditions:



Burning position: horizontal
 Body temperature: 650°C - 950°C
 Pinch temperature: < 300°C
 Ignition retardation: 30 s

Life time:

Useful lifetime: 1000 h
 Intensity drop: ≤ 20 % 315-400 nm nm after
 800 h - based on 20 h level
 Power switching: 25' / 5' (on/off) On/Off

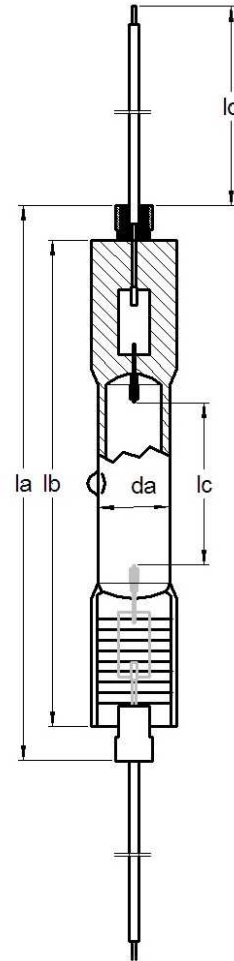

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

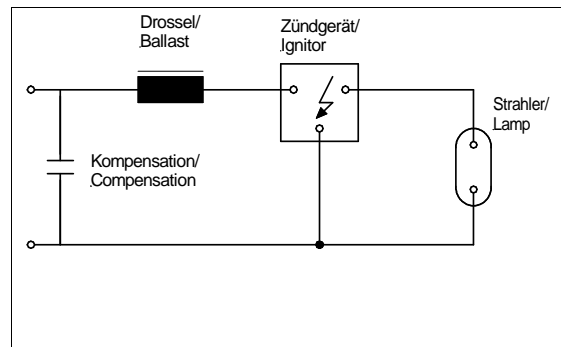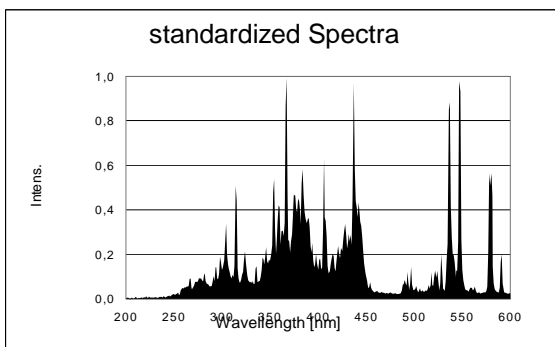

HN Sunlight GmbH
 Original Hanau SunCare
 Wilhelm-Rohn-Straße 25
 D-63450 Hanau
 Phone: 06181 / 35-5092
 Fax.: 06181 / 35-5096
 E-Mail: info@original-hanau-suncera.com
 www.original-hanau-suncare.com

