# Technical Data

HN Sunlight

MagicSun

## OH M 30/50 E, 45006357

Hg metal halide lamp

***Dimensions:***

| | | |
|---|---|---|
| la: 108,5 mm $^{+1,0}_{-1,0}$ | lc: 32,0 mm | le: 55,0 mm |
| lb: 93,0 mm | ld: | da:16,3 mm |
| Connection / socket: | GY9,5 | |

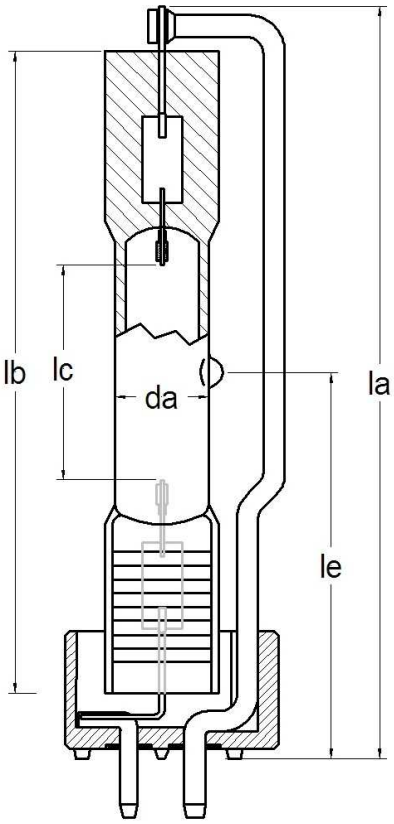


**Electrical data:**

| | |
|---|---|
| Lamp wattage: | 500 W |
| Lamp voltage: | 125 (±15,0)V |
| Lamp current: | 4,3 A |
| Line voltage: | 230 V |
| Ballast: | Ballast 400 HP \|\| 100 HP |
| Ignitor: | ZRM 4.5 ES/B |

**Operating conditions:**

| | |
|---|---|
| Burning position: | vertical |
| Body temperature: | 650℃ - 950℃ |
| Pinch temperature: | < 300℃ |
| Ignition retardation: | 30 s |

***Life time:***

| | |
|---|---|
| Useful lifetime: | 1000 h |
| Intensity drop: | <= 20 % 315-400 nm nm after 800 h - based on 20 h level |
| Power switching: | 25' / 5' (on / off) On/Off |

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

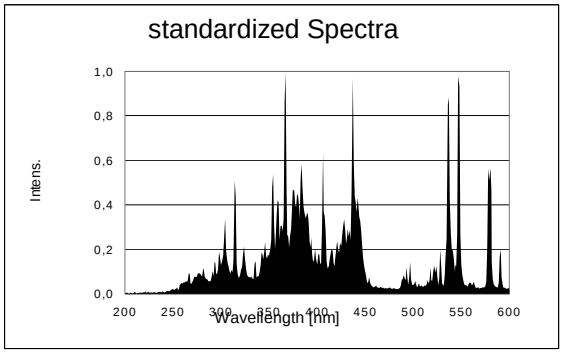


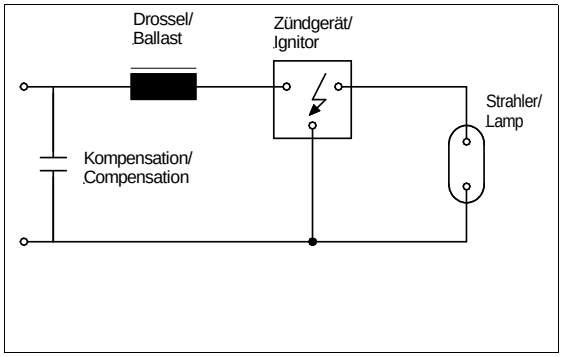


**HN Sunlight GmbH**
Original Hanau SunCare
Wilhelm-Rohn-Straße 25
D-63450 Hanau
Phone: 06181 / 35-5092
Fax.: 06181 / 35-5096
E-Mail: info@original-hanau-suncera.com
www.original-hanau-suncare.com

CE

ORIGINAL HANAU SUNCARE

31. Mrz. 08