Technical Data

NewColors

OH N 500 S, 45002247

Hg metal halide lamp

Dimensions:

la: 106,0 mm $^{+0,0}_{-3,0}$	lc: 32,0 mm	le:
lb: 93,0 mm	ld:	da:16,3 mm
Connection / socket:	R7s	

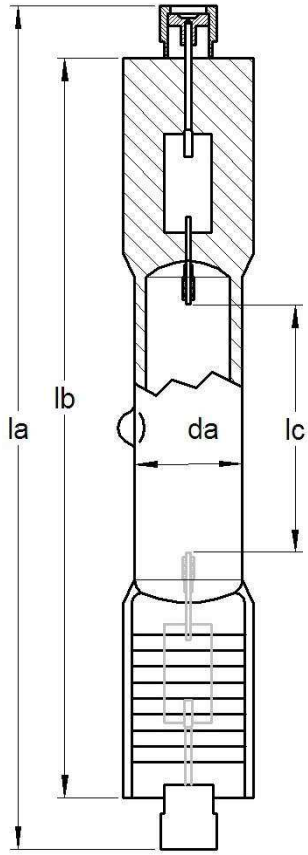

Electrical data:

Lamp wattage:	500 W
Lamp voltage:	145 (±15,0)V
Lamp current:	4,0 A
Line voltage:	230 V
Ballast:	Ballast 400 HP || 100 HP
Ignitor:	ZRM 4.5 ES/B

Operating conditions:

Burning position:	vertical
Body temperature:	650°C - 950°C
Pinch temperature:	< 300°C
Ignition retardation:	30 s

Life time:

Useful lifetime:	800 h
Intensity drop:	<= 30 % 315-400 nm nm after 600 h - based on 20 h level
Power switching:	25' / 5' (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

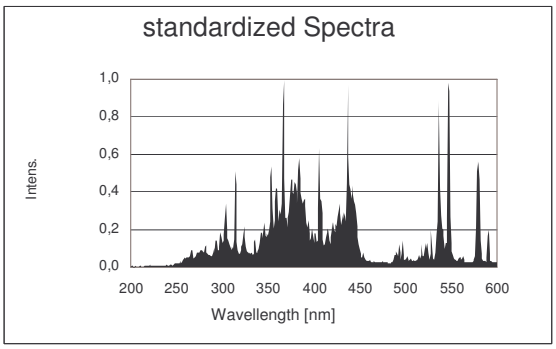

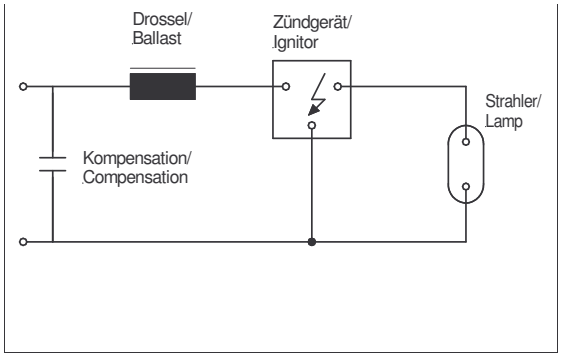

Heraeus Noblelight GmbH
Original Hanau SunCare
Heraeusstraße 12-14
D-63450 Hanau
Phone: 06181 / 35-5092
Fax.: 06181 / 35-5096
E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

CE

ORIGINAL HANAU SUNCARE

01. Dez. 05

Technical Data

NewColors

OH N 500 S, 45002247

Hg metal halide lamp

Dimensions:

la: 106,0 mm $^{+0,0}_{-3,0}$	lc: 32,0 mm	le:
lb: 93,0 mm	ld:	da:16,3 mm
Connection / socket:	R7S	

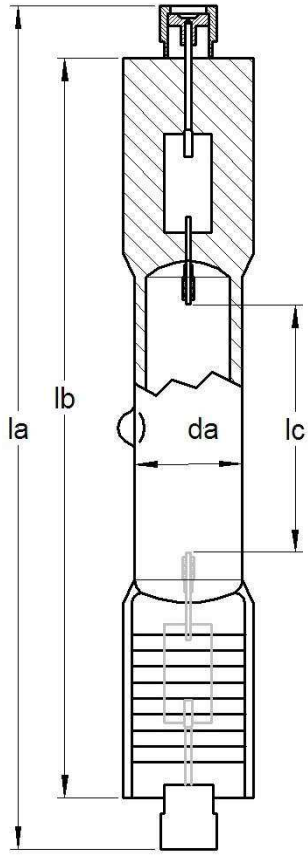

Electrical data:

Lamp wattage:	500 W
Lamp voltage:	145 (±15,0)V
Lamp current:	4,0 A
Line voltage:	230 V
Ballast:	Ballast 400 HP || 100 HP
Ignitor:	ZRM 4.5 ES/B

Operating conditions:

Burning position:	vertical
Body temperature:	650°C - 950°C
Pinch temperature:	< 300°C
Ignition retardation:	30 s

Life time:

Useful lifetime:	800 h
Intensity drop:	<= 30 % 315-400 nm nm after 600 h - based on 20 h level
Power switching:	25' / 5' (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

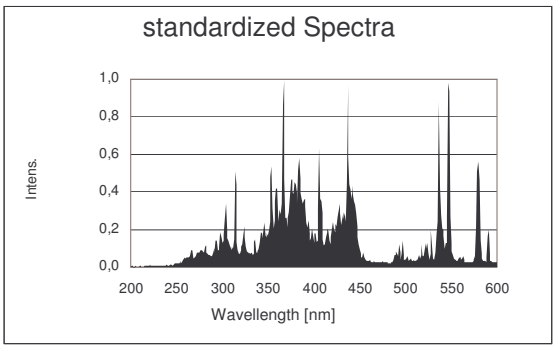

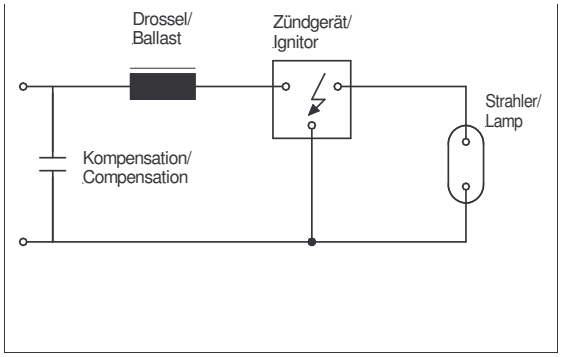

Heraeus Noblelight GmbH
Original Hanau SunCare
Heraeusstraße 12-14
D-63450 Hanau
Phone: 06181 / 35-5092
Fax.: 06181 / 35-5096
E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

CE

ORIGINAL HANAU SUNCARE

01. Dez. 05