

## Technical Data

### NewColors

## OH N 2000 PLUS, 45002257

Hg metal halide lamp

### Dimensions:

la: 171,0 mm <sup>+2,0</sup>/<sub>-2,0</sub>    lc: 75,0 mm    le:  
 lb: 139,0 mm    ld: 425,0 m <sup>+5,0</sup>/<sub>-5,0</sub>    da:24,5 mm

Connection / socket:      Litzen / abisolierte Enden

### Electrical data:


Lamp wattage:              2.000 W  
 Lamp voltage:              250 (±20,0)V  
 Lamp current:              8,6 A  
 Line voltage:              400 V  
 Ballast:                      L.P.F.Ballast HMB 943 Fa.Parr  
 Ignitor:                      380 MZ 1500/2000 Fa. BAG

### Operating conditions:



Burning position:          vertical  
 Body temperature:        650 °C - 950 °C  
 Pinch temperature:       < 300 °C  
 Ignition retardation:      30 s

### Life time:

Useful lifetime:            800 h  
 Intensity drop:            <= 30 % 315-400 nm nm after  
                                     600 h - based on 20 h level  
 Power switching:         25' / 5' (on/off) On/Off

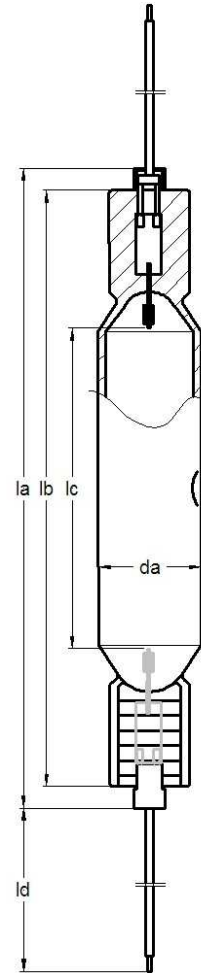

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

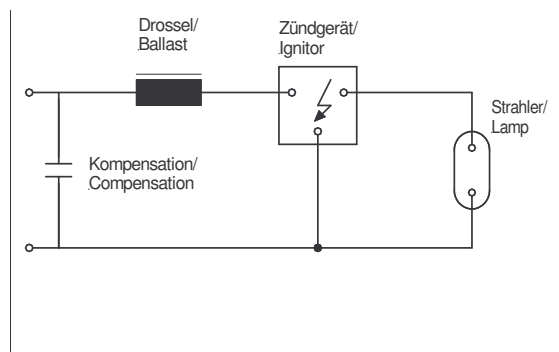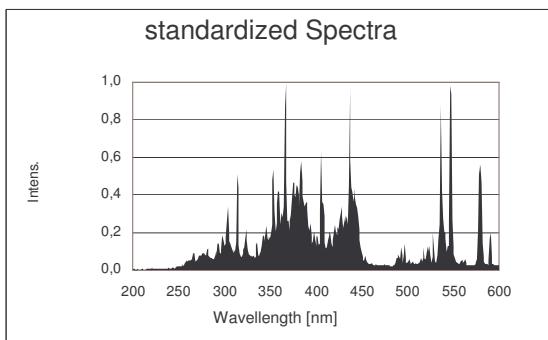

**Heraeus Noblelight GmbH**  
 Original Hanau SunCare  
 Heraeusstraße 12-14  
 D-63450 Hanau  
 Phone: 06181 / 35-5092  
 Fax.: 06181 / 35-5096  
 E-Mail: [suncare@heraeus.com](mailto:suncare@heraeus.com)  
[www.heraeus-noblelight.com](http://www.heraeus-noblelight.com)

