Technical Data

NewColors

OH N 70/100 E, 45004995

Hg metal halide lamp

Dimensions:

la: 129,0 mm $^{+1,0}_{-1,0}$ lc: 29,0 mm le: 74,0 mm

lb: 92,0 mm ld: da:24,5 mm

Connection / socket: GY9,5 (high version)

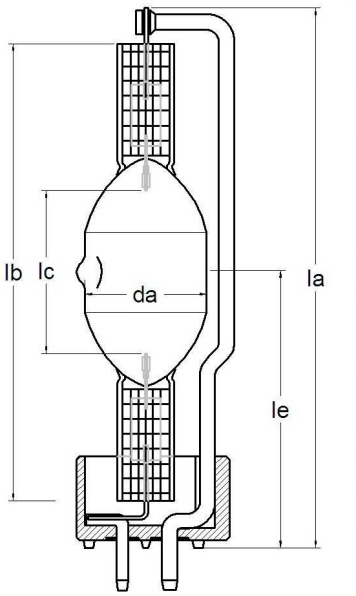

Electrical data:

Lamp wattage:	1.000 W
Lamp voltage:	140 (±15,0)V
Lamp current:	8,2 A
Line voltage:	230 V
Ballast:	NQI 1000-04.2H34 Fa. M+C
Ignitor:	ZRM 12-ES 230 V Tridonic

Operating conditions:

Burning position:	vertical
Body temperature:	650℃ - 950℃
Pinch temperature:	< 300℃
Ignition retardation:	30 s

Life time:

Useful lifetime:	750 h
Intensity drop:	<= 30 % 315-400 nm nm after 600 h - based on 20 h level
Power switching:	2,5h / 0,5h (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

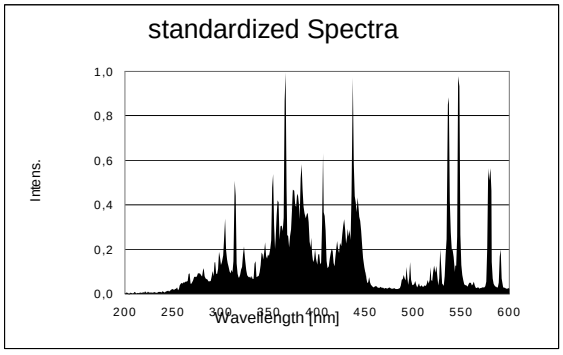

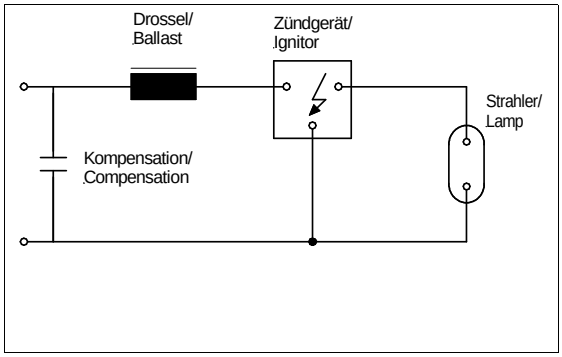

Heraeus Noblelight GmbH
Original Hanau SunCare
Heraeusstraße 12-14
D-63450 Hanau
Phone: 06181 / 35-5092
Fax.: 06181 / 35-5096
E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

CE

ORIGINAL HANAU SUNCARE

22. Nov. 06