

Technical Data

CLASSICS

OH C 610 KS, 45006400

Hg metal halide lamp

Dimensions:

la: 141,0 mm ^{+1,0}/_{-1,0} lc: 49,0 mm le:
 lb: 109,0 mm ld: da: 16,3 mm
 Connection / socket: block socket

Electrical data:

Lamp wattage: 600 W
 Lamp voltage: 135 (±15,0)V
 Lamp current: 4,6 A
 Line voltage: 230 V
 Ballast: 400-03.2H ||100W LP ||100W L
 Ignitor: ZRM 4.5 ES/B




Operating conditions:

Burning position: horizontal
 Body temperature: 650°C - 950°C
 Pinch temperature: < 300°C
 Ignition retardation: 30 s

Life time:

Useful lifetime: 700 h
 Intensity drop: ≤ 30 % 315-400 nm nm after
 500 h - based on 20 h level
 Power switching: 25' / 5' (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

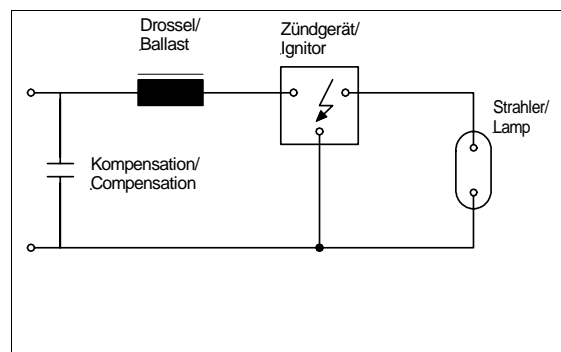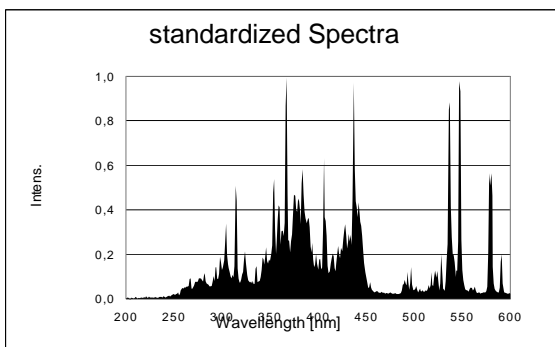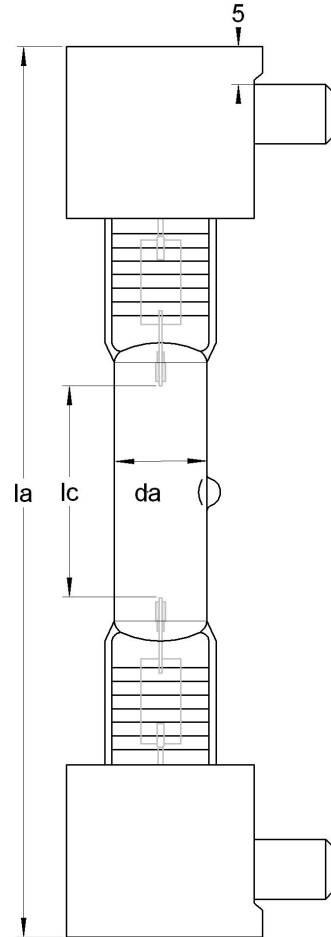

Heraeus Noblelight GmbH
 Original Hanau SunCare
 Heraeusstraße 12-14
 D-63450 Hanau
 Phone: 06181 / 35-5092
 Fax.: 06181 / 35-5096
 E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

