

## Technical Data

# CLASSICS

## OH C 2500 KS, 45006402

Hg metal halide lamp

### Dimensions:

la: 200,0 mm <sup>+1,0</sup>/<sub>-1,0</sub>    lc: 105,0 mm    le:  
 lb: 169,0 mm    ld:                    da:28,0 mm  
 Connection / socket:            block socket

### Electrical data:


Lamp wattage:                    2.000 W  
 Lamp voltage:                    265 (±15,0)V  
 Lamp current:                    8,0 A  
 Line voltage:                    400 V  
 Ballast:                          QIV 2000-04.2H Fa. M+C  
 Ignitor:                          ZRM 12 ES/B 400

### Operating conditions:



Burning position:                vertical  
 Body temperature:               650 °C - 950 °C  
 Pinch temperature:              < 300 °C  
 Ignition retardation:            20 s

### Life time:

Useful lifetime:                    1.000 h  
 Intensity drop:                    <= 30 % 315-400 nm nm after  
     500 h - based on 20 h level  
 Power switching:                 25' / 5' (on/off) On/Off

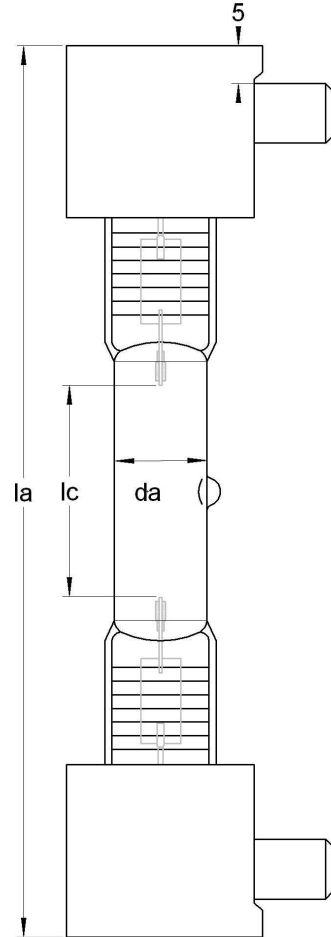

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

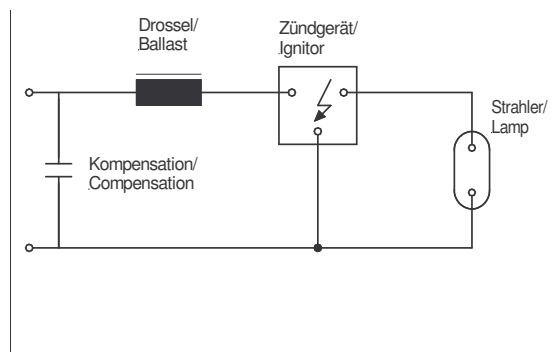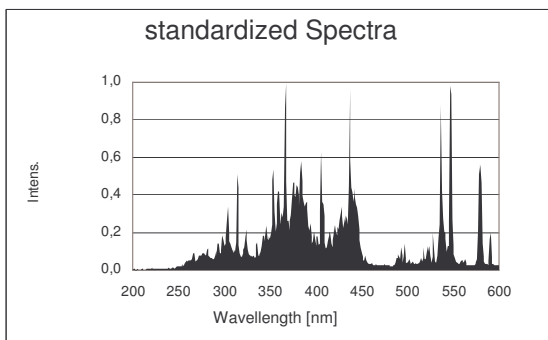

**Heraeus Noblelight GmbH**  
 Original Hanau SunCare  
 Heraeusstraße 12-14  
 D-63450 Hanau  
 Phone: 06181 / 35-5092  
 Fax.: 06181 / 35-5096  
 E-Mail: [suncare@heraeus.com](mailto:suncare@heraeus.com)  
[www.heraeus-noblelight.com](http://www.heraeus-noblelight.com)

