

Technical Data

MagicSun

OH M 800 L, 45006421

Hg metal halide lamp

Dimensions:

la: 115,0 mm ^{+1,5} _{-1,5} lc: 34,0 mm le:
 lb: 94,2 mm ld: 365,0 m ^{+5,0} _{-5,0} da: 18,5 mm
 Connection / socket: Litzen / abisolierte Enden

Electrical data:


Lamp wattage: 800 W
 Lamp voltage: 145 (±15,0)V
 Lamp current: 6,0 A
 Line voltage: 230 V
 Ballast: Bal.400HP Pl. || Bal.400HP Pl.
 Ignitor: Ignitor 10/1000

Operating conditions:



Burning position: vertical
 Body temperature: 650 °C - 950 °C
 Pinch temperature: < 300 °C
 Ignition retardation: 20 s

Life time:

Useful lifetime: 1.000 h
 Intensity drop: ≤ 20 % 315-400 nm nm after
 700 h - based on 20 h level
 Power switching: 25' / 5' (on/off) On/Off

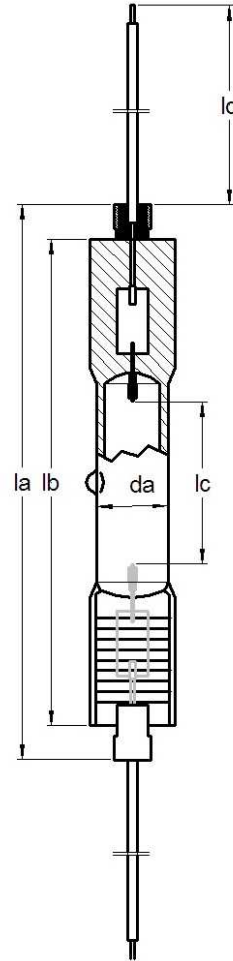

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

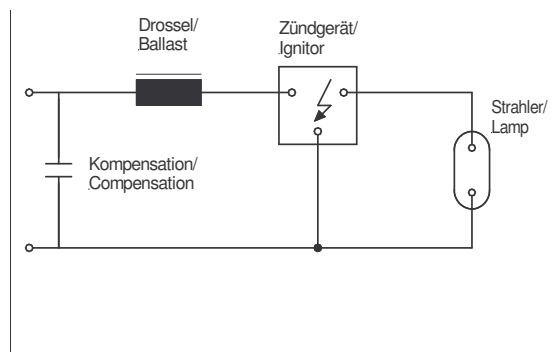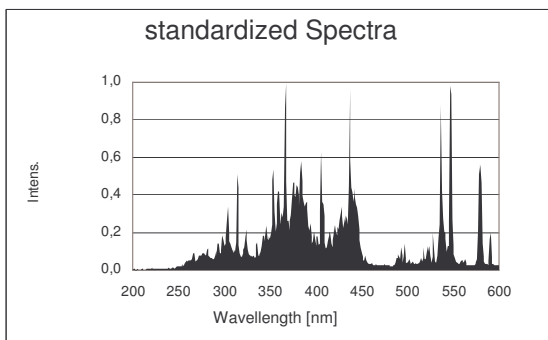

Heraeus Noblelight GmbH
 Original Hanau SunCare
 Heraeusstraße 12-14
 D-63450 Hanau
 Phone: 06181 / 35-5092
 Fax.: 06181 / 35-5096
 E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

