

Technical Data

CLASSICS

OH C 1144 Z4, 56001207

Hg metal halide lamp

Dimensions:

la: 137,0 mm ^{+2,0}/_{-2,0} lc: 50,0 mm le:
 lb: 114,0 mm ld: 350,0 m ^{+5,0}/_{-5,0} da: 24,5 mm
 Connection / socket: Litzen / abisolierte Enden

Electrical data:


Lamp wattage: 1.000 W
 Lamp voltage: 140 (±15,0)V
 Lamp current: 8,2 A
 Line voltage: 230 V
 Ballast: NQI 1000-04.2H34 Fa. M+C
 Ignitor: ZRM 12-ES 230 V Tridonic

Operating conditions:



Burning position: horizontal
 Body temperature: 650°C - 950°C
 Pinch temperature: < 300°C
 Ignition retardation: 30 s

Life time:

Useful lifetime: 700 h
 Intensity drop: ≤ 30 % 315-400 nm nm after
 500 h - based on 20 h level
 Power switching: 50' / 10' (on/off) On/Off

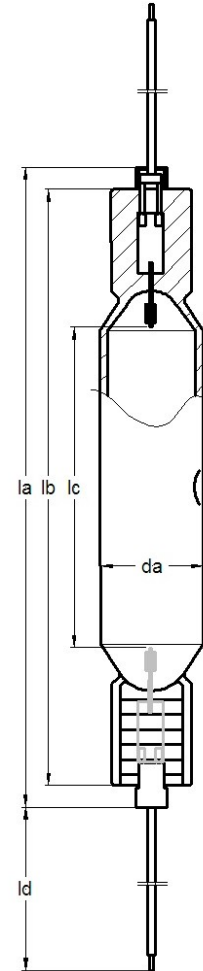

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

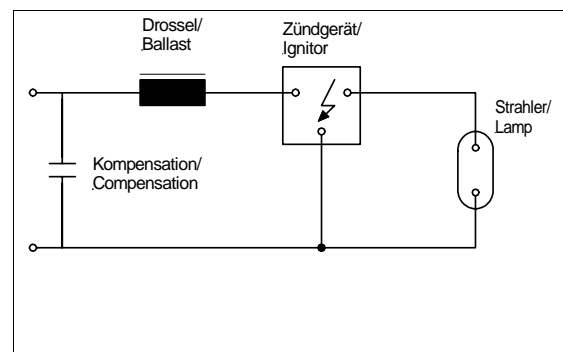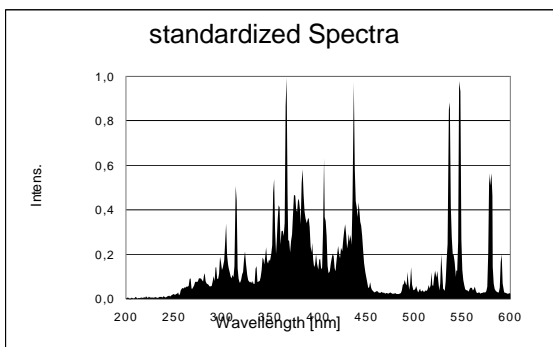

Heraeus Noblelight GmbH
 Original Hanau SunCare
 Heraeusstraße 12-14
 D-63450 Hanau
 Phone: 06181 / 35-5092
 Fax.: 06181 / 35-5096
 E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

