

Technical Data

CLASSICS

OH C 1400 L, 80005860

Hg metal halide lamp

Dimensions:

la: 168,0 mm ^{+2,0}/_{-2,0} lc: 50,0 mm le:
 lb: 114,0 mm ld: 400,0 m ^{+5,0}/_{-5,0} da:28,0 mm

Connection / socket: Litzen / Aderendhülsen

Electrical data:


Lamp wattage: 1.400 W
 Lamp voltage: 145 (±15,0)V
 Lamp current: 11,0 A
 Line voltage: 230 V
 Ballast: NQ1 1000-04.2H34 || NQ1 400
 Ignitor: ZRM 12-ES 230 V Tridonic

Operating conditions:



Burning position: vertical
 Body temperature: 650 °C - 950 °C
 Pinch temperature: < 300 °C
 Ignition retardation: 30 s

Life time:

Useful lifetime: 600 h
 Intensity drop: <= 30 % 315-400 nm nm after
 500 h - based on 20 h level
 Power switching: 25' / 5' (on/off) On/Off

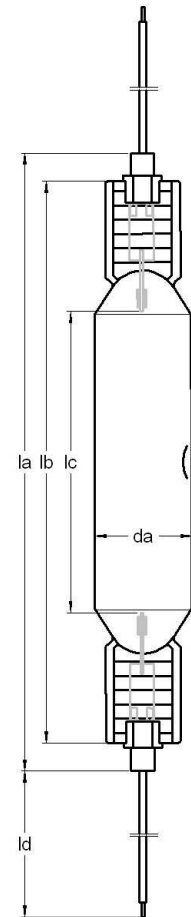

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

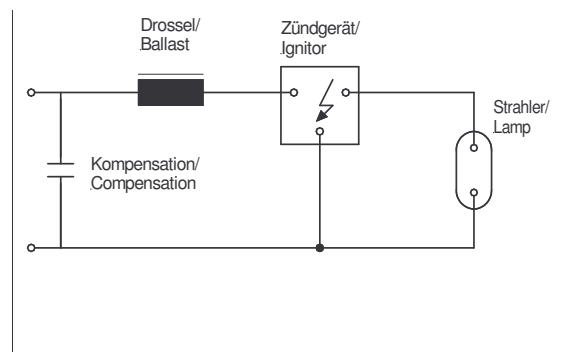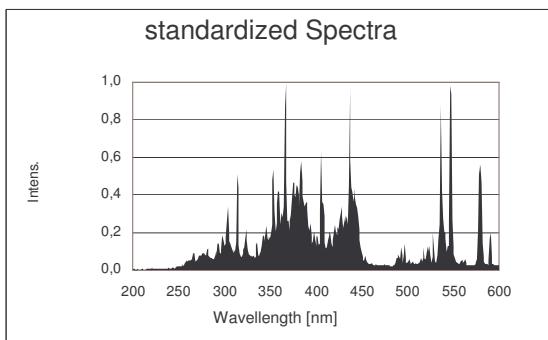

Heraeus Noblelight GmbH
 Original Hanau SunCare
 Heraeusstraße 12-14
 D-63450 Hanau
 Phone: 06181 / 35-5092
 Fax.: 06181 / 35-5096
 E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

