

Technical Data

NewColors

Tanning Tube OH N Speedster 160 HXL R

UV-Code*: 160-R-98/7,9

Article No.: 80006131

Dimensions: See drawing (not to scale)
 Socket: G13 / BiPin
 Reflector: with reflector, type R (reflector angle 210 °)

Electrical Data:

Lamp Wattage nom.: 160 W
 Lamp Voltage: 100 V
 Lamp Current: 1,7 A
 Open-circuit voltage: 230 V / 50 Hz
 Ballast: Ballast 160 LP
 Starter: OH Suncare Power 100 - 180 W
 Compensation: 18,0 µF(± 10% 250V)

Operation conditions:

Cooling: Convection
 Burning Position: Horizontal
 Surrounding temperature: 25 °C ±1°C


Irradiation Data:

(UVB:260-320 nm; UVA:320-400 nm)

UVA Output: 35 W
 UVB Output: 4,8 %
 Luminous colour: Standard blue
 te*: 70 min E_{NMSC} total*: 185,2 mW / m²
 tm*: 200 min E_{NMSC} <=320/E_{NMSC} >320*: 7,9 mW / m²

Lifetime:

Standard lifetime: 800 h
 Reduction of UV-intensity: <= 30 % (320-400 nm) after 600 h
 Based on: 20 h - value

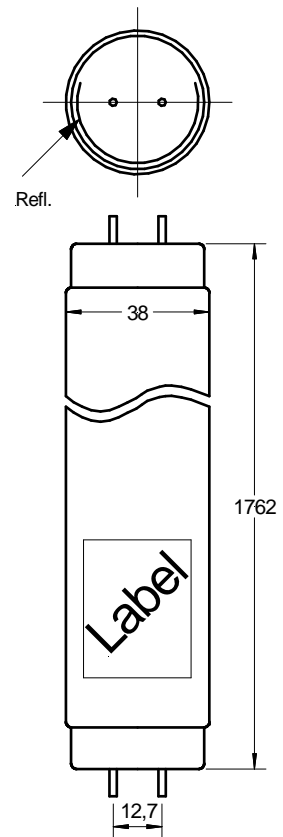

The data given are based on average data und has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

Heraeus reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet."

* These irradiation data of a single tube have been measured in a distance of 25 cm.

** Valid with 1h preageing process, 25 cm distance between tube surface and sensor, in thermal balance.

Sunbed intensity ¹ UVA	UV-Device Type ²	Recommended first exposure time ³ t _e	Recommended max. exposure time ³ t _m
26 mw/cm ²	No	2 Minutes	8 Minutes
30 mw/cm ²	No	1 Minutes	7 Minutes
35 mw/cm ²	No	1 Minutes	6 Minutes
39 mw/cm ²	No	1 Minutes	6 Minutes

¹ UVA-Sunbed intensity, measured in height of the skin surface

² Referring to IEC 60335-2-27

³ Referring to FDA 21 CFR 1002

