Technical Data

NewColors

OH N 70/120 E, 80008600

Hg metal halide lamp

Dimensions:

la: 118,0 mm $^{+1,0}_{-1,0}$	lc: 38,0 mm	le: 61,0 mm
lb: 102,0 mm	ld:	da:25,0 mm
Connection / socket:	GY9,5	

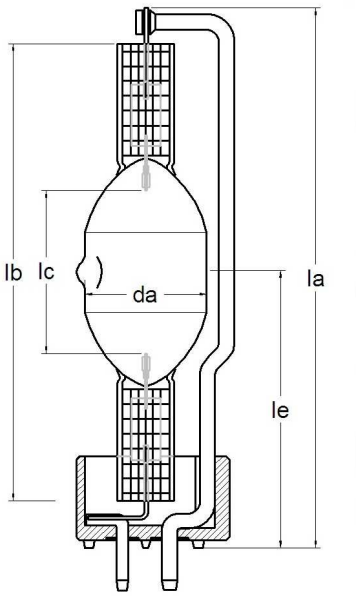

Electrical data:

Lamp wattage:	1.000 W
Lamp voltage:	145 (±15,0)V
Lamp current:	8,0 A
Line voltage:	230 V
Ballast:	NQI 1000-04.2H34 Fa. M+C
Ignitor:	ZRM 12-ES 230 V Tridonic

Operating conditions:

Burning position:	vertical
Body temperature:	650°C - 950°C
Pinch temperature:	< 300°C
Ignition retardation:	35 s

Life time:

Useful lifetime:	800 h
Intensity drop:	<= 30 % 315-400 nm nm after 600 h - based on 20 h level
Power switching:	25' / 5' (on/off) On/Off

All data is based on average values. Due to technical and/or physical reason each lamp could spread up to +/- 10 %..

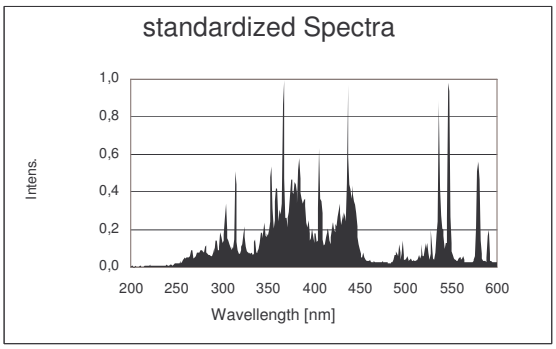

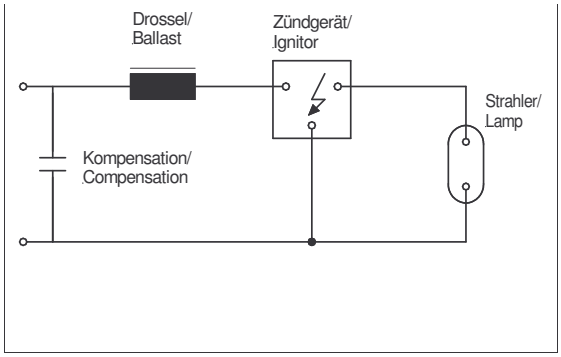

Heraeus Noblelight GmbH
Original Hanau SunCare
Heraeusstraße 12-14
D-63450 Hanau
Phone: 06181 / 35-5092
Fax.: 06181 / 35-5096
E-Mail: suncare@heraeus.com
www.heraeus-noblelight.com

CE

ORIGINAL HANAU SUNCARE

01. Dez. 05