

Technical Data Sheet

Original Hanau SunCare Magnetic Chokes for UV-Tanning Tubes

Ballast 160 LP

Article No.: 80009167


Electrical data:

Nominal wattage of UV-Tubes:	160 W
Nominal lamp current:	1,5 A
Line voltage:	230 V
Mains frequency:	50 Hz
Electrical contacts for:	160W UV – 230V
Connection:	Plug in terminals 0,5 – 1,5 mm ²

Operating data:

Temperature rise:	70 K
Intrinsic losses:	13 W (bei 25°C copper temp.)
Max. permissible housing temperature tw:	130 °C
Parallel compensation:	15 µF \pm 10% 250 V
Weight:	1,57 kg

Geometric Data:

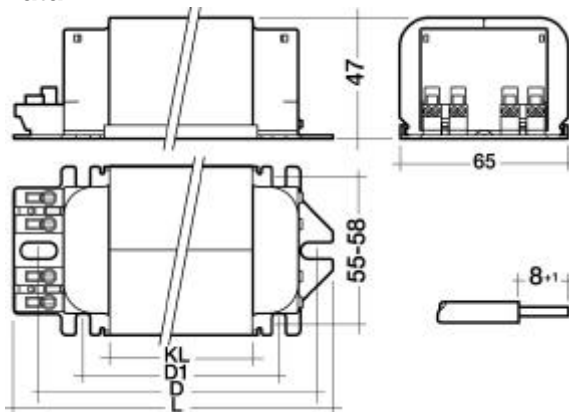

Approval symbol:



Anticipated service life:

10 years

(for continuous operating with a ballast temperature of 130°C)

The given figures represent typical data based on average values achieved under standardized conditions in the laboratory. For physical/technical reasons operating values are subject to piece to piece variation.

Heraeus Noblelight GmbH
Original Hanau SunCare
Heraeusstraße 12–14
D – 63450 Hanau
Tel.: +49 6181 / 35-5092
Fax: +49 6181 / 35-5096
E-Mail: suncare@heraeus.com
www.original-hanau-suncare.com

