

Technical Data Sheet

Original Hanau SunCare Magnetic Chokes for UV-Tanning Lamps

Ballast 2000 HP 400

Article No.: 80006737


Electrical data:

Nominal wattage of UV-Lamps:	2000 W
Nominal lamp current:	8,8 A
Line voltage:	400 V
Mains frequency:	50 Hz
Electrical contacts for:	380-400-415-IGN
Connection:	Plug in terminals 1,0 – 6,0 mm ²

Operating data:

Temperature rise:	80 K
Intrinsic losses:	75 W (25°C copper temp.)
Max. permissible housing temperature tw:	130 °C
Parallel compensation:	37,0 µF ±10% 450 V
Weight:	10,5 kg

Geometric Data:

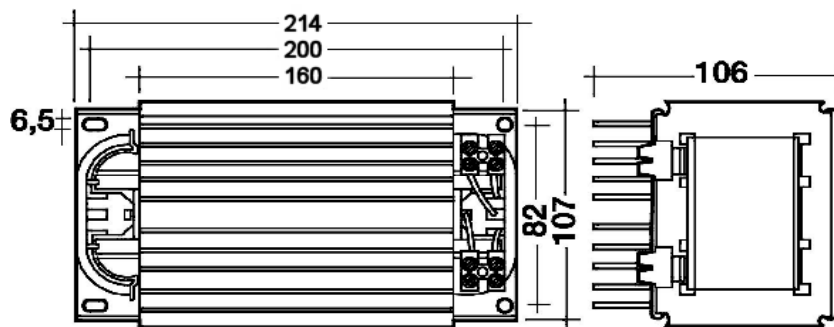

Approval symbol:



Anticipated service life:

10 years

(for continuous operating with a ballast temperature of 130°C)

The given figures represent typical data based on average values achieved under standardized conditions in the laboratory. For physical/technical reasons operating values are subject to piece to piece variation.

Heraeus Noblelight GmbH

Original Hanau SunCare
Heraeusstraße 12-14
D – 63450 Hanau
Tel.: +49 6181 / 35-5092
Fax: +49 6181 / 35-5096
E-Mail: suncare@heraeus.com
www.original-hanau-suncare.com

