

Technical Data

CLASSICS

Tanning Tube OH C 140 XL R

UV-Code*: 140-R-51/4,7

Article No.: 45006681

Dimensions: See drawing (not to scale)
 Socket: G13 / BiPin
 Reflector: with reflector, type R (reflector angle 210 °)

Electrical Data:

Lamp Wattage nom.: 140 W
 Lamp Voltage: 80 V
 Lamp Current: 1,6 A
 Open-circuit voltage: 230 V / 50 Hz
 Ballast: Ballast 140 LP
 Starter: OH Suncare Power 100 - 180 W
 Compensation: 18,0 µF(± 10% 250V)

Operation conditions:

Cooling: Convection
 Burning Position: Horizontal
 Surrounding temperature: 25 °C ±1°C


Irradiation Data:

(UVB:260-320 nm; UVA:320-400 nm)

UVA Output: 24 W
 UVB Output: 3,4 %
 Luminous colour: Standard blue
 te*: 140 min E_{NMSC} total*: 97,6 mW / m²
 tm*: 380 min E_{NMSC} <=320/E_{NMSC} >320*: 4,7 mW / m²

Lifetime:

Standard lifetime: 600 h
 Reduction of UV-intensity: <= 30 % (320-400 nm) after 500 h
 Based on: 20 h - value

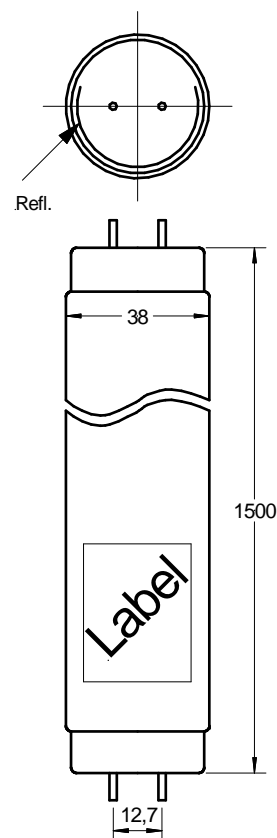

The data given are based on average data and has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

Heraeus reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet."

* These irradiation data of a single tube have been measured in a distance of 25 cm.

** Valid with 1h preageing process, 25 cm distance between tube surface and sensor, in thermal balance.

| Sunbed intensity ¹ UVA | UV-Device Type ² | Recommended first exposure time ³ t _e | Recommended max. exposure time ³ t _m |
|--------------------------------------|--------------------------------|--|---|
| 17 mw/cm ² | II | 4 Minutes | 22 Minutes |
| 20 mw/cm ² | II | 4 Minutes | 19 Minutes |
| 23 mw/cm ² | No | 3 Minutes | 16 Minutes |
| 26 mw/cm ² | No | 3 Minutes | 15 Minutes |

¹ UVA-Sunbed intensity, measured in height of the skin surface

² Referring to IEC 60335-2-27

³ Referring to FDA 21 CFR 1002

Heraeus Noblelight LLC * 2150 Northmont Parkway, Suite L
 GA 30096 USA - Duluth * United States
 Phone: +1 770 418 0707 * Fax.: +49 6181 / 35-5096
 E-Mail: tanning@noblelight.net * www.original-hanau-suncare.com/us



07.11.2006