

Technical Data

CLASSICS

Tanning Tube OH C 160 XS R

UV-Code:^{**} 160-R-24/1,8

Article No.: 80004311

Dimensions:

See drawing (not to scale)
 Socket: G13 / BiPin
 Reflector: with reflector, type R (reflector angle 210 °)

Electrical Data:

Lamp Wattage nom.: 160 W
 Lamp Voltage: 90 V
 Lamp Current: 1,7 A
 Open-circuit voltage: 230 V / 50 Hz
 Ballast: Ballast 160 LP
 Starter: OH Suncare Power 100 - 180 W
 Compensation: 18,0 µF(± 10% 250V)

Operation conditions:

Cooling: Convection
 Burning Position: Horizontal
 Surrounding temperature: 25 °C ±1°C

Irradiation Data:

UVA Output: 34 W
 UVB Output: 0,6 %
 Sun erythema factor:^{*} 0,08
 Luminous colour: Standard blue
 (UVB:280-315 nm; UVA:315-400 nm)

E_{er} total: [*]	23,6 mW/m ²	E_{NMSC} total: [*]	36,0 mW/m ²
$E_{er} \leq 320$: [*]	11,1 mW/m ²	$E_{NMSC} \leq 320 / E_{NMSC} > 320$: [*]	1,8
$E_{er} > 320$: [*]	12,5 mW/m ²	E_{pi} : [*]	18,8 W/m ²

Lifetime:


Standard lifetime: 600 h
 Reduction of UV-intensity: ≤ 30 % (315-450 nm) after 500 h
 Based on: 20 h - value

The data given are based on average data and has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

^{*} These irradiation data of a single tube have been measured in a distance of 25 cm.

^{**} Valid with 1h preageing process, 25 cm distance between tube surface and sensor, in thermal balance.

Heraeus reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet."

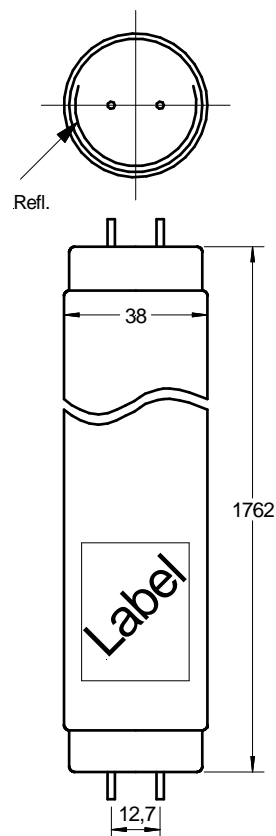

Sunbed intensity *1 (315-400 nm)	UV- *2 Device type	First tanning time *3	Tanning time in minutes *3			MED/h Skin type 3	UV- *4 Index
			Skin type 2	Skin type 3	Skin type 4		
17 mW/cm ²	II	12 min	29 min	41 min	53 min	1	6
20 mW/cm ²	II	10 min	25 min	35 min	45 min	2	7
23 mW/cm ²	II	9 min	22 min	30 min	39 min	2	8
26 mW/cm ²	II	8 min	19 min	27 min	35 min	2	9

*1 UVA- Sunbed intensity, measured in height of the skin surface; *2 Referring DIN EN 60335-2-27; *3 Referring DIN 5050 Part 2; *4 Referring BfS

Heraeus Noblelight GmbH

Original Hanau SunCare
 Heraeusstraße 12-14
 D-63450 Hanau
 Phone: +49 6181 / 35-5092
 Fax.: +49 6181 / 35-5096
 E-Mail: suncare@heraeus.com
www.original-hanau-suncare.com

